


5602 - THE ROYAL ENTRANCE



Read carefully the cautions and installation instructions before assembly and using your step

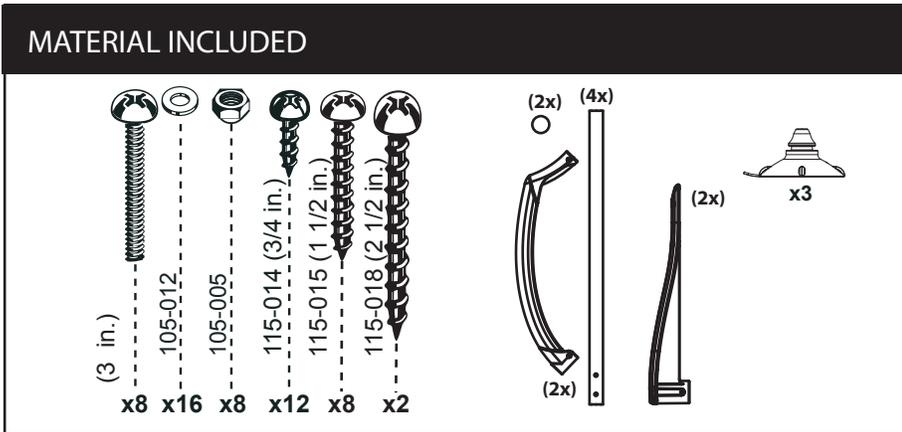

Required tools :


- Automatic screwdriver
- Vice grip or wrench 7/16

Not included :

- Shim
- Pea gravel

Note : You will need approximately 50 lbs. of pea gravel.


***** Caution : File off all stripped or sharp edges before assembly to avoid injuries and pool damage. To ease the installation of rails and bolts, use a screwdriver to line up the holes.**

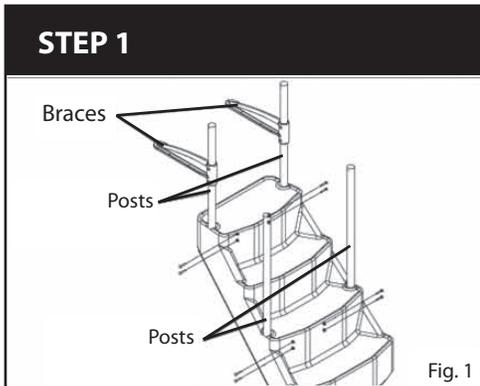

1. Insert the posts into the step and align with the predrilled holes. Attach using the 3" bolts (8), washers (16), and nuts (8). Slide the braces over the posts and leave unattached (Fig. 1)

2. Insert the handrails onto the posts. Attach using the 3/4" screws (8) (Fig. 2).

3. Pour pea gravel (approx. 50 lbs.) into the fence until it is 3/4 full (Fig. 3). Install the cap properly with the 3/4" screws.

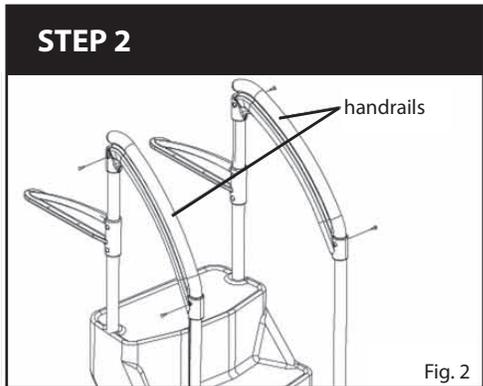




4. Slide the fence into the step and push it towards the foot of the step. (Fig. 4)

CAUTION: The safety fence is not supposed to touch the liner.


5. Lower the step into the water. Move it to its permanent location and level it horizontally.

IMPORTANT: Leave a minimum of 1" of space between the pool wall and the step.

6. Lower the braces until they rest on the deck. Attach using the 3/4" screws (4) (Fig. 5). See the circled section (Fig. 5).

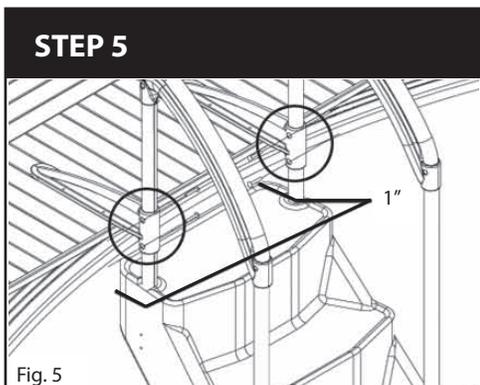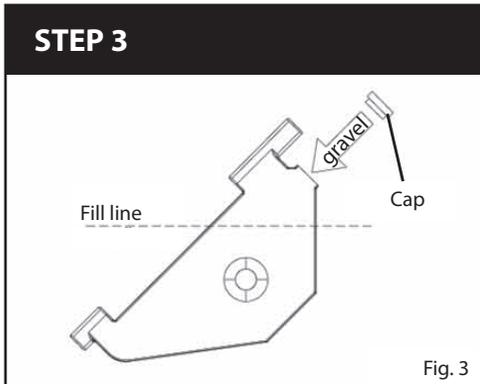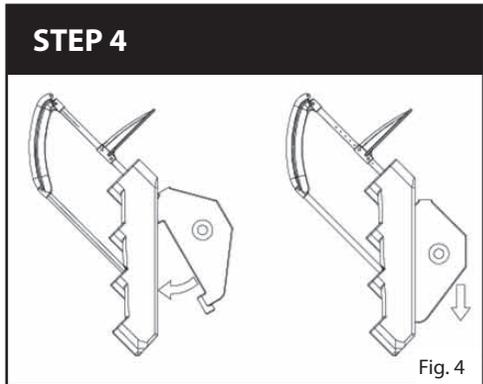

7. Attach the braces to the deck using the screws provided. If the deck is above the toprail, attach the braces directly to the deck (Fig. 6).

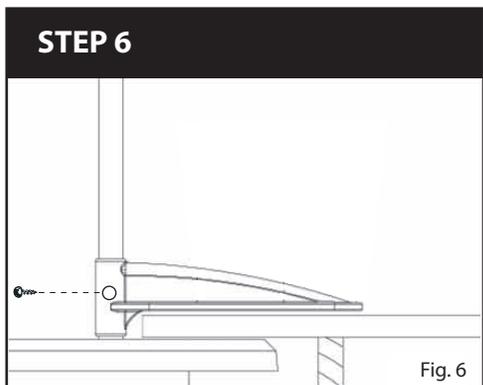

STEP 7

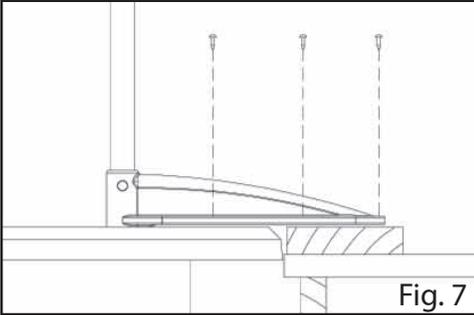


Fig. 7

8. If the deck is lower than the pool, the braces should be shimmed* to attain the same level as the pool (Fig. 7). Ensure the shim is properly secured to the deck.

9. If the pool is lower than the deck, the braces should be shimmed* to attain the same level as the deck (Fig. 8). Ensure the shim is properly secured to the top rail.

STEP 8

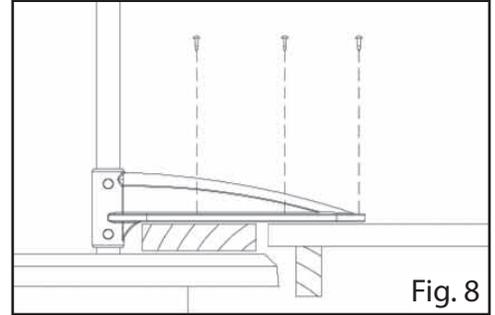



Fig. 8



REMEMBER - Nothing replaces parental supervision. Watch children at all times.


CAUTION

- :: Locate the step on a solid base.
- :: Do not jump or dive from the step.
- :: The step should be removed from the water when temperatures drop below freezing.
- :: Never lift the step by its rails.
- :: Use battery-operated tools to avoid electric shock near water.
- :: Ensure no corrosive materials are added to the step or hardware kit.
- :: The step shall be installed per manufacturer's instructions.
- :: File off all stripped or sharp edges before assembly to avoid injuries and pool damage.
- :: The manufacturer is not responsible for damages or injuries caused by improper installation or use.
- :: For more protection, we suggest to install a Step Pad under the step.

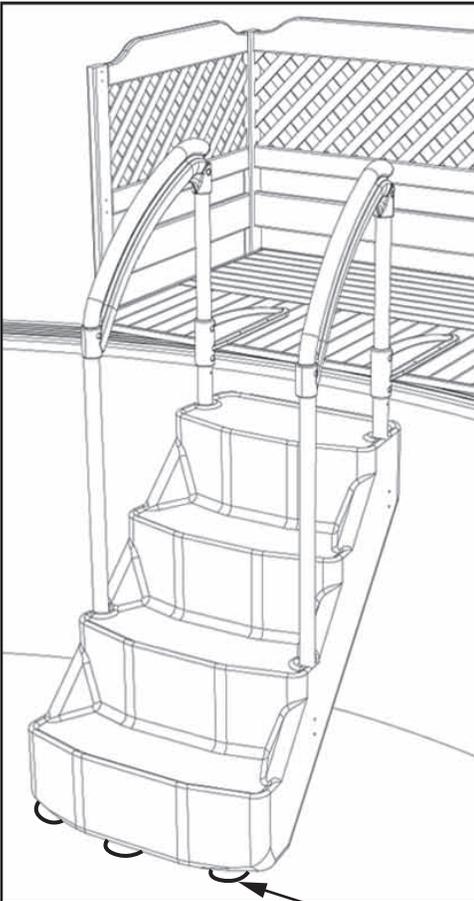


STEP CUPS™ INSTALLATION

1) Insert half of the Step Cup™ mushroom in the hole, at a 45 degree angle.

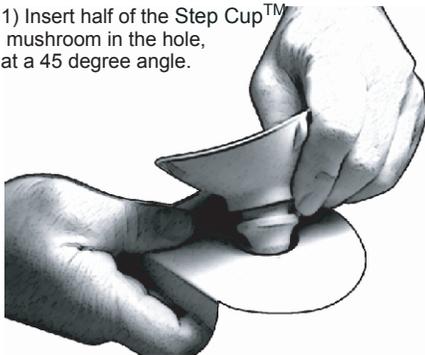

2) With a flat screwdriver, compress the Step Cup™ mushroom ring while pushing it into the hole.

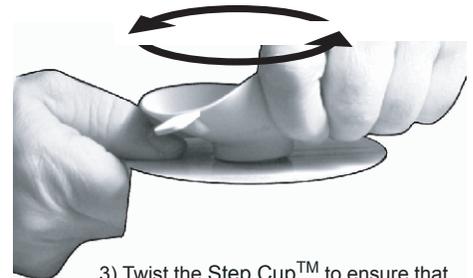

3) Twist the Step Cup™ to ensure that its mushroom has entirely cleared the wall thickness. If it has, the suction cup should rotate freely.