
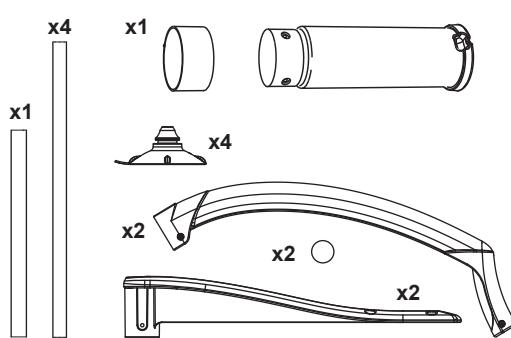



# WALK WAY DECK ASSEMBLY

## Contents of Accessory box # 955-014



## Walk Way Step

Sand  
(Not included )





## ! WARNING

- ◆ Do not dive or jump from the step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions .
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.

## Required tools

(not included)

Use small locking pliers / vice grip or a wrench 7/16"

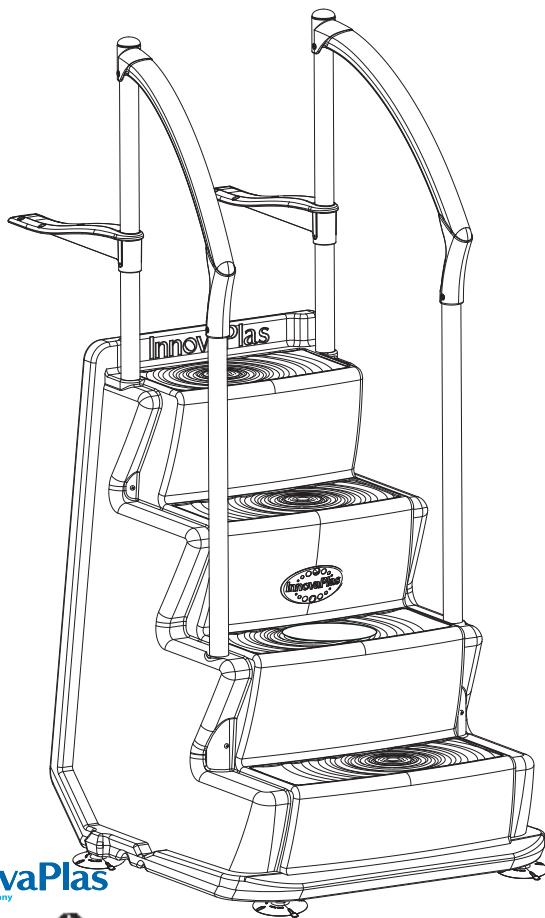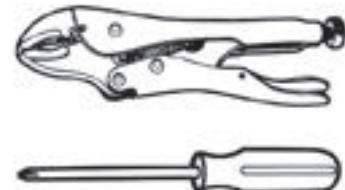




A

1) Flip the Walk Way so that the steps are directly facing the ground.

2) Place the support tube, one side at a time, in the pockets located in the bottom lip.

3) Flip the step back to its original usage position.

4) Secure the support tube to the step with the screws provided.

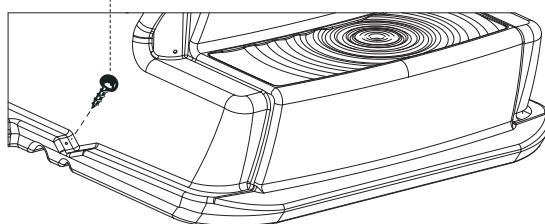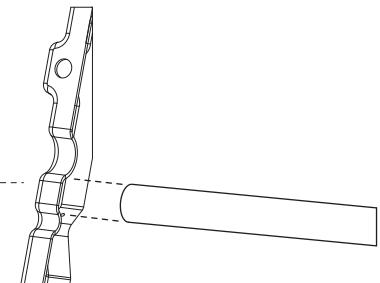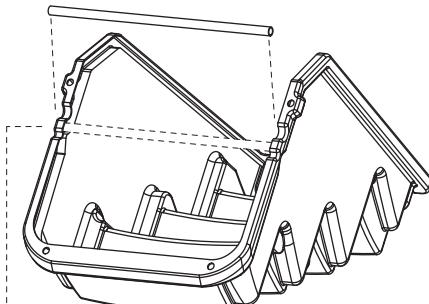


# B

1) Insert the four posts into the step. Secure the posts in place with the bolts, washers and nuts provided.

2) Insert the deck arms over the 2 rear posts. Do not secure.

3) Insert the post covers into the large handrails and secure the handrails to the posts with the screws provided.


115-010  
x4  
105-012  
x4  
105-005  
x4

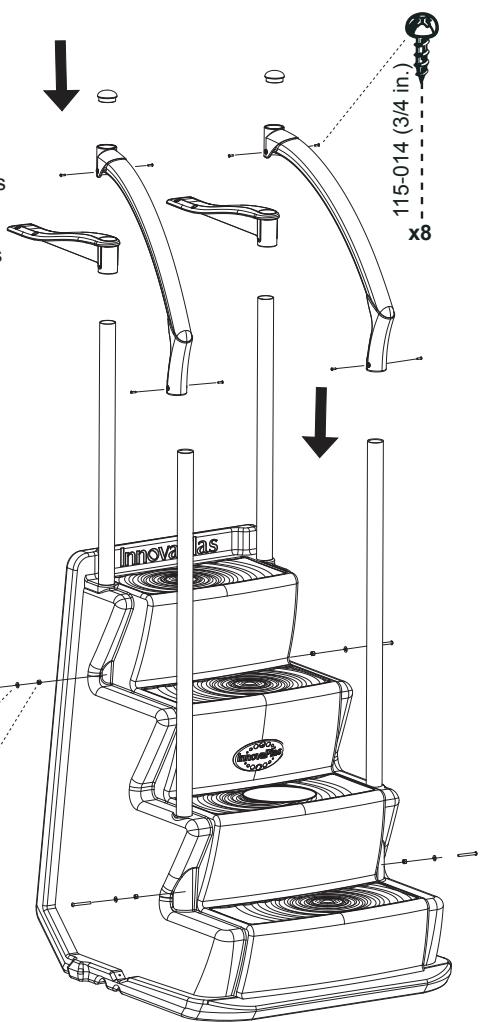

# C

1) Fill the counterweight to the brim with sand.

2) Secure the counterweight cover with the screws provided.

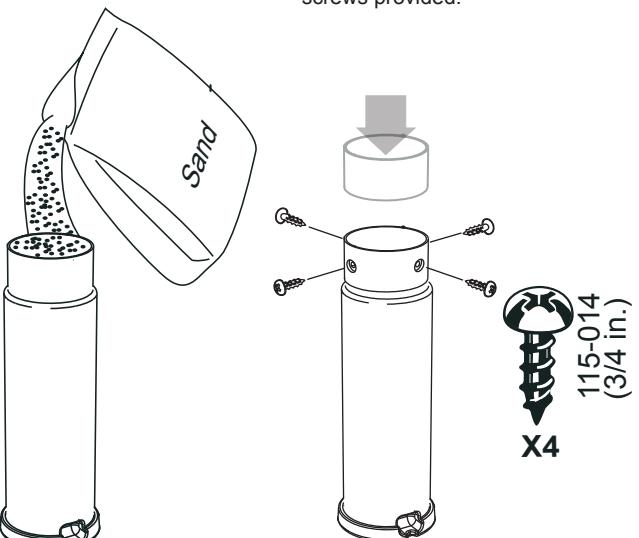

# D


1) Snap the suction cups into the 4 holes under the step. Push while twisting, till the upper cup mushroom has cleared the wall thickness of the step.



# E

1) Insert the entire step into the pool. Be careful not to damage the pool liner.

2) Slide the deck arms to the height of the deck.

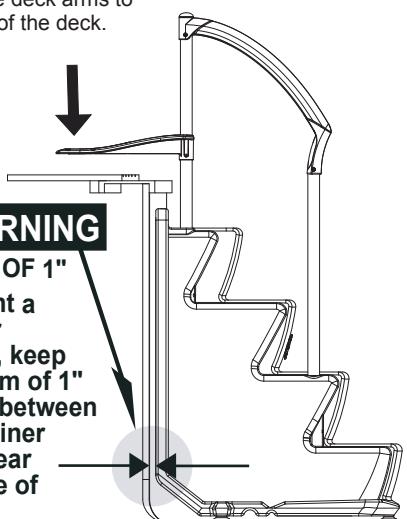

## ! WARNING



MINIMUM OF 1"

To prevent a pool liner puncture, keep a minimum of 1" inch gap between the pool liner and the rear underside of the step.

# F

115-015 (1 1/2 IN.)  
x8  
115-018 (2 1/2 IN.)  
x2

1) Secure the deck arms to the deck using the screws provided.

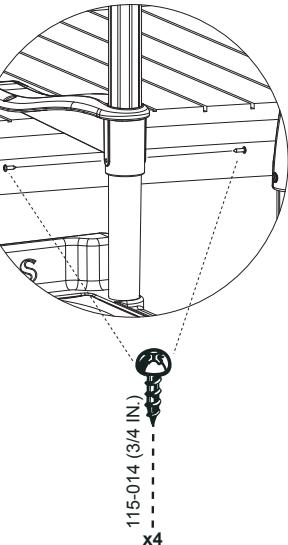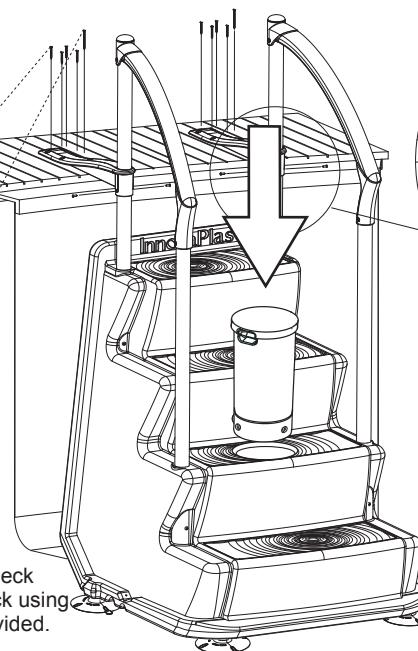

2) Secure the deck arms to the posts with the screws provided.

