

FRESHWATER AG+® ACE ADAPTER INSTALLATION INSTRUCTIONS

The FreshWater_{Ag+} adapter gives a Hot Spring® Spa or Limelight® hot tub owner the ability to use the FreshWater_{Ag+} Silver Ion Cartridge and ACE® System simultaneously. The following instructions illustrate how to attach the FreshWater_{Ag+} adapter to either a Hot Spring® Spa or a Limelight® hot tub:




**FreshWater_{Ag+} Adapter
attached to a Hot Spring Filter
(Tri-X® or Standard Paper 30 sq. ft.)**




**FreshWater_{Ag+} Adapter
attached to a Limelight Filter
(65 sq. ft.)**

Hot Spring Installation:

1. Attach the FreshWater_{Ag+} Silver Ion Cartridge to the FreshWater_{Ag+} adapter.
2. Remove the filter cap with cell, and filter.
3. Place FreshWater_{Ag+} adapter around the standpipe resting it on the bottom of the filter bucket.
4. Replace filter, lower ACE cell into standpipe, and fasten the filter using the ACE filter cap.

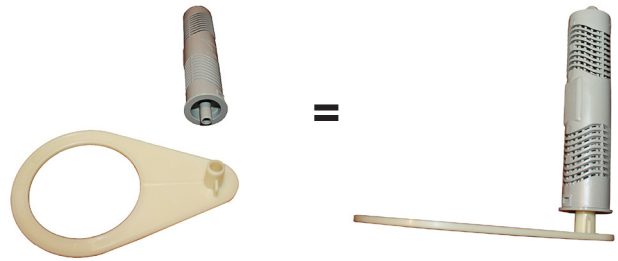

NOTE: Once installed, the FreshWater_{Ag+} Silver Ion Cartridge may be removed without removing the filter by lifting and twisting the FreshWater_{Ag+} Silver Ion Cartridge.

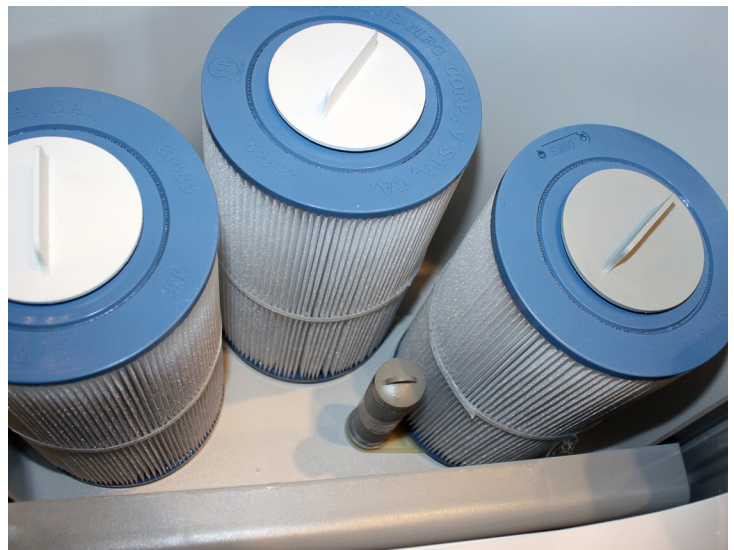

Limelight Installation:

1. Attach the FreshWater_{Ag+} Silver Ion Cartridge to the FreshWater_{Ag+} adapter.
2. Remove the filter cap, and cell,
3. Place filter cap into large opening of the FreshWater_{Ag+} adapter. Attach the filter cap.
4. Raise weir and lower the FreshWater_{Ag+} Silver Ion Cartridge into small opening of the FreshWater_{Ag+} adapter as shown below. Check for any interference between weir, adapter, and cartridge. Rotate adapter and cartridge if interference exists.

